



Overview of elements 2024

Ordering correctly

Necessary Order Information


Complete and accurate data is absolutely necessary for the processing and production of your order, since an accurate and clear order allows us to immediately begin processing your order without time-consuming enquiries.

For this reason, your order must contain the following information:

- Range name and front number
- Handle number
- Drill pattern number
- Carcase colour number
- Plinth height and colour
(if not specified, the standard plinth height of 150 mm will be supplied)
- Worktop design / décor
- Worktop edge design / edge colour
- Worktop sketch with dimensions and indication of tongue and groove joints
- Design of the worktop outer corner (for APD): square or round
- Upright / top shelf design including the colour number and upright thickness / Upright panel floor seal colour
- Shelf colours
- Glass design and / or colour
- Roll-up front colour
- Cornice profile / light pelmet profile including colour for each
- Order number and / or abbreviation
- Manufacturer information and built-in appliance model identification
- Kitchen block number (for kitchen block orders)
- Layout sketch with dimension information in 1:20 ratio
- Please draw / write any special productions in the centre of the layout sketch

Dimensional drawings for upright panels

Uprights at end of run for base units, sideboards and tall units are supplied as standard with an upright panel shoe. The upright panel shoe is included in the price of the upright panel and is available in: 014 Stainless steel appearance, 010 Black. If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.

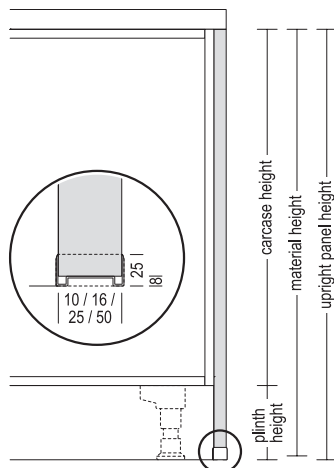


The height of the upright panel is reduced by the interior height dimensions of the profile and thus calculated as follows:

$$\begin{aligned}
 &\text{carcase height} \\
 &+ \text{plinth height} \\
 &- 8 \text{ mm interior chamfering of the floor profile} \\
 &= \text{material height}
 \end{aligned}$$

Base units

Carcase depth: 561 mm
Carcase height: 720 mm
Plinth height: 70, 100, 150 or 200 mm


Base units



717

UD 20/30/40/45/50/60 cm


Base unit
1 continuous door,
1 shelf



141

U 20/30/40/45/50/60 cm


Base unit
1 pinned door,
1 shelf



717

UD 80/90/100/120 cm


Base unit
2 continuous doors,
1 shelf



141

U 80/90/100/120 cm


Base unit
2 pinned doors,
1 shelf



141

US 30/40/45/50/60 cm


Base unit
1 drawer,
1 door,
1 shelf



141

US 80/90/100/120 cm


Base unit
2 drawers,
2 doors,
1 shelf



141

USG 80/90/100/120 cm


Base unit
1 drawer,
2 doors,
1 shelf



141

UA 30/40/45/50/60/80/90/100/120 cm


Pull-out unit
1 drawer,
2 pull-outs



141

U3SA 30/40/45/50/60/80/90/100/120 cm


Drawer unit
3 drawers,
1 pull-out



717

UAMD 20/30 cm


Pull-out unit
1 pull-out,
1 continuous front,
2 hanging baskets with
wooden bottoms



UR 15/20/30/40/45/50/60 cm

Open shelf base unit
2 fixed shelves,
side depth: 582 mm


Corner base units



717

UDTE 80/90 cm

Corner base unit
2 continuous doors,
opening angle: 165°,
1 shelf



141

UTE 80/90 cm


Corner base unit
2 pinned doors,
opening angle: 165°,
1 shelf



717

UEDK 80/90 cm


Corner base unit as carousel unit
2 continuous fronts,
carcase height: 750 mm,
1 revolving carousel with
2 wooden shelves and
metal railing, rotates 360°,
height adjustable top shelf



141

UEK 80/90 cm


Corner base unit as carousel unit
2 pinned fronts,
carcase height: 750 mm,
1 revolving carousel with
2 wooden shelves and
metal railing, rotates 360°,
height adjustable top shelf



717

UED 80/90 cm

Chamfered corner base unit
1 continuous door,
1 shelf




141

UE 80/90 cm

Chamfered corner base unit
1 pinned door,
1 shelf

Half corner base units



717


UED90-40

UED90-45

UED100-50

UED100-60

Corner base unit
1 continuous door,
1 shelf,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm



141


UE90-40

UE90-45

UE100-50

UE100-60

Corner base unit
1 drawer,
1 door,
1 shelf,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm




717

UEDSA90-45

UEDSA100-50

UEDSA100-60

Corner unit with swivel pull-out
1 continuous door,
2 tablar shelves
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm




141

UESA90-45

UESA100-50

UESA100-60

Corner unit with swivel pull-out
1 drawer,
1 door,
2 wooden swivel tablars
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm




141

UESAV90-45

UESAV100-50

UESAV100-60

Corner unit with swivel pull-out
1 pinned door,
2 tablar shelves
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm




MP-GS

Surcharge for recessed fillers
on fillers and half corner
units, side panel made of
carcase material,
in carcase height
incl. 2 plinth feet for
on-site assembly,
carcase depth: 561 mm

Base units

Carcase depth: 561 mm
Carcase height: 720 mm
Plinth height: 70, 100, 150 oder 200 mm

Angle fillers




UPE
UPE-V

Angle filler

Continuous front material,
70 x 70 mm, planning
dimensions: 650 x 650 mm

as above, however **variable**
from 50 to 170 mm, planning
dimensions: 630 - 750 mm
1st dimension = left /
2nd dimension = right




MP-GS

Surcharge for recessed fillers

on fillers and half corner
units, side panel made of
carcase material,
in carcase height
incl. 2 plinth feet for
on-site assembly,
carcase depth: 561 mm


Fillers / Panelling



UPK 10/20 cm

Filler


Carcase material,
720 mm high,
U-shaped seal for
connection to wall,
width: 100 / 200 mm



UPD 20 cm

Front filler


Continuous front material,
width: 200 mm



RK-72

Base unit back panel

16 mm thick,
720 mm high,
width: 250 - 2000 mm,
available in all carcase and
worktop décors from décor
group 1,
Vario clip fastening,
in case of reproduction
finishes vertical wood grain




RKS-72

as above, however,
continuous height,
including floor profile:
70 mm plinth height:
810 mm
100 mm plinth height:
840 mm
150 mm plinth height:
890 mm
200 mm plinth height:
940 mm

Available floor profile colours:


010 Black
014 Stainless steel
appearance



RFD-72
30/40/45/50/60/80/90 cm

Base unit back panel
1 continuous front design,
720 mm high,
Vario clip fastening,
without drill hole


Cooker housing



HU 60 cm

Cooker housing


1 fixed panel,
side sections: 202 mm deep,
aperture dimension: 591 mm



HUB 60 cm

Cooker housing


1 fixed panel,
aperture dimension: 598 mm



HUS 60 cm

Cooker housing

1 plastic drawer,
16 l capacity,
interior dimensions:
485 x 480 x 68 mm,
aperture dimension: 598 mm




HUG 60 cm

Cooker housing

1 large-capacity drawer with
second level for baking trays,
plastic, 30 l capacity,
interior dimensions:
480 x 380 x 150 mm,
aperture dimension: 598 mm

Hot plate units



KD60 60 cm

Hot plate unit

1 internal panel,
1 construction shelf for
heat insulation,
1 door,
1 shelf



K60 60 cm

Hot plate unit


1 fixed panel,
1 construction shelf for
heat insulation,
1 door,
1 shelf



KS60 60 cm

Hot plate unit

1 drawer,
1 spacer shelf for hot plate,
1 door,
1 shelf



KS2A
60/80/90/100/120 cm

Hot plate unit

1 drawer,
1 spacer shelf for hot plate,
2 pull-outs




KD2A
60/80/90/100/120 cm

Hot plate unit

1 internal panel,
1 construction shelf for heat
insulation,
2 pull-outs


Sink units



SPUD 40/45/50/60 cm

Sink base unit


1 internal panel,
1 continuous door



SPU 40/45/50/60 cm

Sink base unit


1 fixed panel,
1 door



SPUD 80/90/100/120 cm

Sink base unit


2 internal panels,
2 continuous doors



SPU 80/90/100/120 cm

Sink base unit


2 fixed panels,
2 doors



SPUAD
40/45/50/60 cm

Sink base unit


1 internal panel,
1 continuous front with
centred handle,
without pull-out rails and
drill holes



SPUA 40/45/50/60 cm

Sink base unit


1 fixed panel,
1 front with centred handle,
without pull-out rails and
drill holes



SPUDA-ASK
45/50/60 cm


Sink base unit

Separato-K
1 internal panel,
1 pull-out, 500 mm deep, with
waste separation system
Separato-K
with pull-out lid,
1 x 18 and 2 x 8 litres,
500 mm width: with
1 side organiser,
600 mm width: with
2 side organisers,
1 bio lid (for all widths)



18L
8L 8L
1450/500/6001

Doors for integrated appliances



GSB 45/60 cm

Door


for integrated
dishwashers,
without handle



GSBD*-I 45/60 cm

Continuous door

for fully integrated
dishwashers,
built-under fridge and
freezer units
with pull-outs



GSB*-I 45/60 cm

Pinned door


for fully integrated
dishwashers,
built-under fridge and
freezer units
with pull-outs

Base units in XL height

Carcase depth: 561 mm
Carcase height: 792 mm
Plinth height: 70, 100, 150 or 200 mm




XL Base units




XL Base unit
1 continuous door,
2 shelves

UD*-X 20/30/40/45/50/60 cm




XL Base unit
1 pinned door,
2 shelves

U*-X 20/30/40/45/50/60 cm




XL Base unit
2 continuous doors,
2 shelves

UD*-X 80/90/100/120 cm




XL Base unit
2 pinned doors,
2 shelves

U*-X 80/90/100/120 cm




XL Base unit
1 drawer,
1 door,
1 shelf

US*-X 30/40/45/50/60 cm




XL Base unit
2 drawers,
2 doors,
1 shelf

US*-X 80/90/100/120 cm




XL Base unit
1 drawer,
2 doors,
1 shelf

USG*-X 80/90/100/120 cm




XL Pull-out unit
1 drawer,
2 pull-outs

UA*-X 30/40/45/50/60/80/90/100/120 cm




XL Drawer unit
3 drawers,
1 pull-out

U3SA*-X 30/40/45/50/60/80/90/100/120 cm



XL Pull-out unit
1 pull-out,
1 continuous front,
2 hanging baskets with
wooden bottoms


UAMD*-X 20/30 cm



XL Open shelf base unit
2 fixed shelves,
side depth: 582 mm


UR*-X 15/20/30/40/45/50/60 cm

XL Corner base units




XL Corner base unit
2 continuous doors,
opening angle: 165°,
2 shelves

UDTE*-X 80/90 cm




XL Corner base unit
2 pinned doors,
opening angle: 165°,
2 shelves

UTE*-X 80/90 cm




XL Corner base unit as carousel unit
2 continuous fronts,
Unit height: 822 mm,
1 revolving carousel with
2 wooden shelves and
metal railing,
rotates 360°
height adjustable top shelf

UEDK*-X 80/90 cm




XL Corner base unit as carousel unit
2 pinned fronts,
Unit height: 822 mm,
1 revolving carousel with
2 wooden shelves and
metal railing,
rotates 360°
height adjustable top shelf

UEK*-X 80/90 cm



XL Chamfered corner base unit
1 continuous door,
2 shelves


UED*-X 80/90 cm



XL Chamfered corner base unit
1 pinned door,
2 shelves


UE*-X 80/90 cm

XL Half-corner units




XL Corner base unit
1 continuous door,
2 shelves,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UED90-40-X
UED90-45-X
UED100-50-X
UED100-60-X




XL Corner base unit
1 drawer,
1 door,
1 shelf,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UE90-40-X
UE90-45-X
UE100-50-X
UE100-60-X




XL Corner unit with swivel pull-out
1 continuous door,
2 wooden swivel tablars
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UEDSA90-45-X
UEDSA100-50-X
UEDSA100-60-X



XL Corner unit with swivel pull-out
1 drawer,
1 door,
2 wooden swivel tablars
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UESA90-45-X
UESA100-50-X
UESA100-60-X



XL Corner unit with swivel pull-out
1 pinned door,
2 wooden swivel tablars
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

UESAV90-45-X
UESAV100-50-X
UESAV100-60-X



Surcharge for recessed fillers
on fillers and half corner
units, side panel made of
carcase material,
in carcase height
incl. 2 plinth feet for
on-site assembly,
carcase depth: 561 mm


MP-GS

Base units in XL height

Carcase depth: 561 mm
Carcase height: 792 mm
Plinth height: 70, 100, 150 or 200 mm




XL Angle fillers



UPE-X
UPE-V-X

XL Angle filler
Continuous front material,
70 x 70 mm, Planning
dimensions: 650 x 650 mm


as above, however **variable**
from 50 to 170 mm, Planning
dimensions: 630 - 750 mm
1st dimension = left
2nd dimension = right




MP-GS

Surcharge for recessed fillers
on fillers and half corner
units, side panel made of
carcase material,
in carcase height
incl. 2 plinth feet for
on-site assembly,
carcase depth: 561 mm

XL Fillers / Panelling




UPK*-X 10/20 cm



UPD*-X 20 cm


XL Filler
Carcase material,
792 mm high,
U-shaped seal for
connection to wall,
width: 100 / 200 mm

XL Front filler
Continuous front material,
width: 200 mm



RK-79


XL Base unit back panel
16 mm thick,
792 mm high,
width: 250 - 2000 mm,
available in all carcase and
worktop décors from décor
group 1,
Vario clip fastening,
in case of reproduction
finishes vertical wood grain



RKS-79

as above, however,
including floor profile:
70 mm plinth height:
882 mm
100 mm plinth height:
912 mm
150 mm plinth height:
962 mm
200 mm plinth height:
1012 mm

Available floor profile colours:
010 Black
014 Stainless steel
appearance



RFD*-79
30/40/45/50/60 cm


XL Base unit back panel
1 continuous front,
789 mm high,
Vario clip fastening,
without drill holes

XL Cooker housings




HUB-X 60 cm

XL Cooker housing
1 fixed panel,
aperture dimension: 595 mm



HUS*-X 60 cm

XL Cooker housing
1 plastic drawer,
16 l capacity,
interior dimensions:
485 x 480 x 68 mm
aperture dimension: 595 mm



HUG-X 60 cm


XL Cooker housing
1 large-capacity drawer
with second level for baking
trays, plastic, 30 l capacity,
interior dimensions:
480 x 380 x 150 mm,
aperture dimension: 595 mm

XL Hot plate units




KD60-X 60 cm

XL Hot plate unit
1 internal panel,
1 construction shelf for heat
insulation,
1 door,
2 shelves




K60-X 60 cm

XL Hot plate unit
1 fixed panel,
1 construction shelf for heat
insulation,
1 door,
1 shelf



KS60-X 60 cm


XL Hot plate unit
1 drawer,
1 spacer shelf for hot plate,
1 door,
1 shelf



KS2A*-X
60/80/90/100/120 cm


XL Hot plate unit
1 drawer,
1 spacer shelf for hot plate,
2 pull-outs

XL-Doors for integrated appliances



GSB*-I-X 45/60 cm


Continuous XL door
for fully integrated
dishwashers,
built-under fridge and
freezer units
with pull-outs,
includes spacer strip



GSB*-I-X 45/60 cm


Pinned XL door
for fully integrated
dishwashers,
built-under fridge and
freezer units
with pull-outs,
includes spacer strip

XL Sink base units




SPUD*-X 40/45/50/60 cm

XL Sink base unit
1 internal panel,
1 continuous door




SPU*-X 40/45/50/60 cm

XL Sink base unit
1 fixed panel,
1 door



SPUD*-X 80/90/100/120 cm

XL Sink base unit
2 internal panels,
2 continuous doors



SPU*-X 80/90/100/120 cm

XL Sink base unit
2 fixed panels,
2 doors



SPUD*-X
40/45/50/60 cm

XL Sink base unit
1 internal panel,
1 continuous front with
centred handle,
without pull-out rails and
drill holes




SPUA*-X 40/45/50/60 cm

XL Sink base unit
1 fixed panel,
1 front with centred handle,
without pull-out rails and
drill holes



SPUDA-ASK*-X
45/50/60 cm



[450/500/600]

XL Sink unit Separato-K
1 internal panel,
1 pull-out, 500 mm deep, with
waste separation system
Separato-K
with pull-out lid,
1 x 18 and 2 x 8 litres,
500 mm width: with
1 side organiser,
600 mm width: with
2 side organisers,
1 bio lid (for all widths)




SPUA-ASK*-X
45/50/60 cm

XL Sink unit Separato-K
1 fixed panel,
1 pull-out, 500 mm deep, with
waste separation system
Separato-K
with pull-out lid,
1 x 18 and 2 x 8 litres,
500 mm width: with
1 side organiser,
600 mm width: with
2 side organisers,
1 bio lid (for all widths)


Worktops | Niche cladding

Worktops



APN
60/70/80/90/100/
110/120 cm


Worktop APN with N-edge
rounded front edge, sides sealed with straight décor edge.
Price per running 100 mm, every 100 mm started will be invoiced.
Max. length:
Décor group 1: 5100 mm,
Décor group 2 (Xtra décors): 4000 mm
Please quote the décor number in your order.



APD
60/70/80/90/100/
110/117 cm


Worktop APD with décor edge
front and side edges coated with straight décor edging material, 1.5 mm thick.
Price per running 100 mm, every 100 mm started will be invoiced.
Max. length:
Décor group 1: 5100 mm,
Décor group 2 (Xtra décors): 4000 mm
Please quote the décor and edge colour number in your order.

Worktop processing




AP-R

Surcharge for exterior and interior roundings deviating from the standard radii



**APN-A
APN-AS
APD-A**

Surcharge for chamfered cuts
on worktops and tables, including edging



AP-NF

Tongue and groove joint
for worktop corners or extensions, incl. screw fittings, tongues and water resistant glue



AP-AUS

Cut-outs for built in hobs, sinks or ventilation grills



AP-IEK

Surcharge for inner corners in square design
on worktops and tables with décor edge

Niche cladding



**NV 54
NV 70**


Niche cladding
coated on both faces, 16 mm thick, **horizontal structure (except 226 Metal art décor and 274 Teramo marble reproduction)**
with edge on all sides, width: 250 - 2580 mm
heights:
NV54 for niches beneath wall units
NV70 for niches beneath cooker hoods

Price per started 100 mm.

NV 203

Niche cladding as above, **however with deviating dimensions acc. to sketch**
max. 2580 mm wide, 2030 mm high,
1st dimension in direction of grain
coated edge all round.
Minimum price: 0.5 m², minimum dimensions: 250 x 200 mm, **invoiced per m².**

Accessories for niche cladding



NPUK 500

Plastic cover profile in translucent appearance
for niche or back panel cladding, 16 mm thick, self-adhesive, 5000 mm long



WAPN
200/400/500 cm

Upstands for continuous planning with niche cladding
2-piece plastic profile with sealing lip, incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep, **delivered as strand material.**

Available in:
014 Stainless steel appearance, 010 Black



WAPN-Z

WAPN accessory bag
matches the plastic upstands WAPN consisting of:
4 x interior corner 90° /
2 x interior corner 135°
2 x exterior corner 90°
2 x set of end caps for WAPN
2 x set of end caps for niche cladding


Available in:
014 Stainless steel appearance, 010 Black



NKPU 200 / 400

Niche profile on bottom
Aluminium profile, 2-piece with sealing profile
for niche and back panel cladding or as upstand, dimensions: 17 mm high, 20 mm deep

Available in:
014 Stainless steel appearance, 010 Black



NKPO 200 / 400

Niche profile on top aluminium profile, stainless steel appearance
for niche cladding incl. 1 set of end caps (left / right), dimensions: 16 mm high, 16 mm deep



NKP-Z

NKP accessory bag
matches upstand NKPU
Available in:
014 Stainless steel appearance, 010 Black




NKP-EK

1 set of end caps
matching aluminium profile for niche cladding NKPO

Upright panels | Top shelves | Wall shelf units


Upright panels for base units



Upright at end of run
incl. floor profile in
014 Stainless steel
appearance or
010 Black,
depth: 583 mm

UWA 10/16/25/50 mm

Plinth height 70 mm: 790 mm
Plinth height 100 mm: 820 mm
Plinth height 150 mm: 870 mm
Plinth height 200 mm: 920 mm




Upright for room designs
depth: 250 to 1166 mm,
edged on both sides,
incl. floor profile in
014 Stainless steel
appearance or
010 Black

UWR 10/16/25/50 mm

Plinth height 70 mm: 790 mm
Plinth height 100 mm: 820 mm
Plinth height 150 mm: 870 mm
Plinth height 200 mm: 920 mm


XL Upright panels for base units



XL Upright at end of run
incl. floor seal in
014 Stainless steel
appearance or
010 Black,
depth: 583 mm

UWA*-X 10/16/25/50 mm

Plinth height 70 mm: 862 mm
Plinth height 100 mm: 892 mm
Plinth height 150 mm: 942 mm
Plinth height 200 mm: 992 mm




XL Upright for room designs
depth: 250 to 1166 mm,
edged on both sides,
incl. floor seal in
014 Stainless steel
appearance or
010 Black

UWR*-X 10/16/25/50 mm

Plinth height 70 mm: 862 mm
Plinth height 100 mm: 892 mm
Plinth height 150 mm: 942 mm
Plinth height 200 mm: 992 mm

Wall shelf units



**WB25 30/40/45/50/55/
60/65/70/80/90/
100/110/120 cm**

**Plug-in wall shelf,
25 mm thick**
Carcase material,
polymer edging all around,
255 mm deep,
incl. metal plug fitting




VB16 100 cm

**Wall shelf unit with shelf
holders, 16 mm thick**
255 mm deep,
polymer edging all round,
**available in widths from
250 mm to 1000 mm,**
includes 2 shelf holders
VBH5

VB16 258 cm

Wall shelf unit with shelf
holders as above,
**however available in
widths from 1001 mm to
2580 mm,**
includes 4 shelf holders
VBH5

**Available shelf holder
colours:**
010 Black
014 Stainless steel
appearance




VB25 100 cm

**Wall shelf unit with shelf
holders, 25 mm thick**
255 mm deep,
polymer edging all round,
**available in widths from
250 mm to 1000 mm,**
includes 2 shelf holders
VBH5

VB25 258 cm

Wall shelf unit with shelf
holders as above,
**however available in
widths from 1001 mm to
2580 mm,**
includes 4 shelf holders
VBH5

**Available shelf holder
colours:**
010 Black
014 Stainless steel
appearance



VB50 100 cm


**Wall shelf unit with shelf
holders, 50 mm thick**
255 mm deep,
polymer edging all round,
**available in widths from
250 mm to 1000 mm,**
includes 2 shelf holders
VBH5

VB50 258 cm

Wall shelf unit with shelf
holders as above,
**however available in
widths from 1001 mm to
2580 mm,**
includes 4 shelf holders
VBH5


**Available shelf holder
colours:**
010 Black
014 Stainless steel
appearance

Upright panels for wall units




**Upright at end of run /
intermediate upright for
wall units,
height 1**
depth: 372 mm,
height: 720 mm

WW 10/16/25/50 mm -1



**Upright at end of run /
intermediate upright for
wall units,
height 2**
depth: 372 mm,
height: 792 mm

WW 10/16/25/50 mm -2



**Upright at end of run /
intermediate upright for
wall units,
height 3**
depth: 372 mm,
height: 864 mm

WW 10/16/25/50 mm -3

Top shelves



ADB10 38/59/117 cm

**Top shelf,
10 mm thick,
for side- or highboard**
coated on both faces,
polymer edged on front
and sides,
length: 250 - 2580 mm



ADB16 38/59/117 cm

**Top shelf,
16 mm thick,
for side- or highboard**
coated on both faces,
polymer edged on front
and sides,
length: 250 - 2580 mm



ADB25 38/59/117 cm

**Top shelf,
25 mm thick,
for side- or highboard**
coated on both faces,
polymer edged on front
and sides,
length: 250 - 2580 mm




ADB50 38/59/117 cm

**Top shelf,
50 mm thick,
for side- or highboard**
coated on both faces,
polymer edged on front
and sides,
length: 250 - 2580 mm

Highboards – 1582 / 1612 / 1662 / 1712 mm high

Carcase depth: 561 mm
Carcase height: 1512 mm
Plinth height: 70, 100, 150 oder 200 mm

Highboards



H 30/40/50/60 cm

Highboard


2 doors,
1 fixed shelf,
3 shelves

XL Highboards – 1654 / 1684 / 1734 / 1784 mm high

Carcase depth: 561 mm
Carcase height: 1584 mm
Plinth height: 70, 100, 150 oder 200 mm



XL Highboards




H*-X 30/40/50/60 cm

XL Highboard

2 doors,
1 fixed shelf,
3 shelves

Housing for ovens




GOS

Oven housing

aperture height: 590 mm
1 fixed compensation panel,
1 drawer,
1 pinned door,
1 shelf

XL Housing for ovens




GDOS-X

XL Oven housing

aperture height: 590 mm
1 fixed compensation panel,
1 drawer,
1 door,
2 shelves


Integrated appliance housings with aperture height up to 880 mm



G88A

Appliance housing for
integrated fridge
aperture height: 880 mm
1 appliance door,
2 pull-outs


XL Integrated appliance housings with aperture height up to 880 mm



G88A-X

XL Appliance housing for
integrated fridge
aperture height: 880 mm
1 appliance door,
2 pull-outs


Integrated appliance housings with aperture height up to 1230 mm



G123S

Appliance housing for
integrated fridge
aperture height: 1230 mm
1 internal panel,
1 appliance door,
1 drawer


XL Integrated appliance housings with aperture height up to 1230 mm



G123A-X

XL Appliance housing for
integrated fridge
aperture height: 1230 mm
1 internal panel,
1 appliance door,
1 pull-out


Appliance housings with aperture height up to 1450 mm



G145

Appliance housing for
integrated fridge / freezer
aperture height: 1450 mm
1 internal panel,
2 appliance doors


XL Appliance housings with aperture height up to 1450 mm



G145-X

XL Appliance housing for
integrated fridge / freezer
aperture height: 1450 mm
2 appliance doors


Fillers



HPK 20 cm

Filler
Carcase material,
1512 mm high,
U-shaped seal for
connection to wall,
width: 230 mm

XL Fillers



HPK20-X 20 cm

XL Filler
Carcase material,
1584 mm high,
U-shaped seal for
connection to wall,
width: 230 mm

Tall units, height 1 – 2086 / 2116 / 2166 / 2216 mm high

Carcase depth: 561 mm
Carcase height: 2016 mm
Plinth height: 70, 100, 150 oder 200 mm


Tall units




H*-1 30/40/50/60 cm




HDV*-1 30/40/50/60 cm

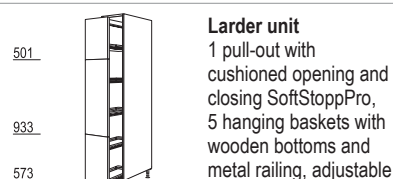


HA*-1 30/40 cm

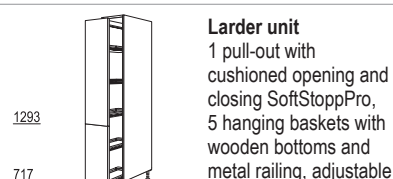

HDA*-1 30/40 cm

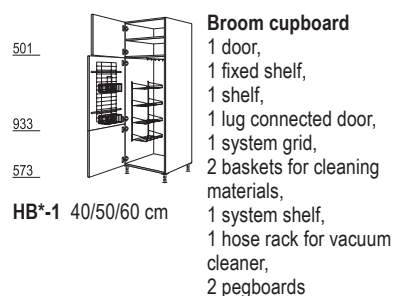

HB*-1 40/50/60 cm

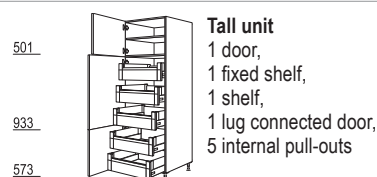

HI*-1 40/50/60 cm


Appliance housing for ovens, microwaves, steam cookers, compact appliances




GO-1




GOS-1

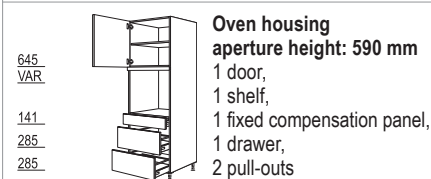


GOS2A-1

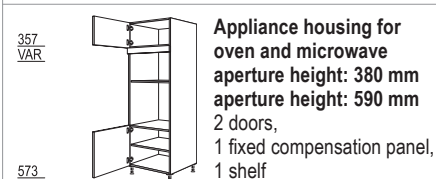


GMO-1

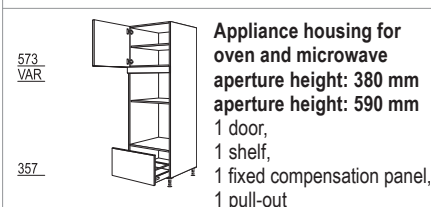

GMOA-1

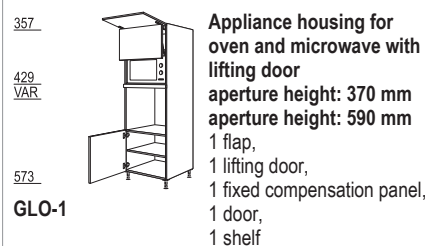


GLO-1

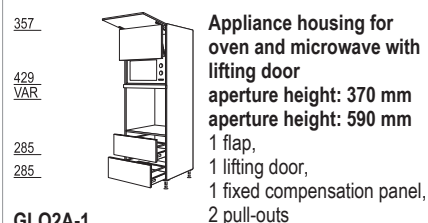


GLO2A-1


Appliance housings with aperture height up to 880 mm

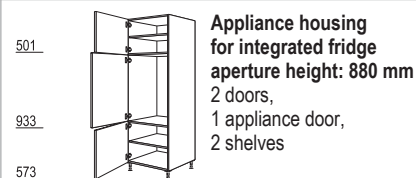

G88-1

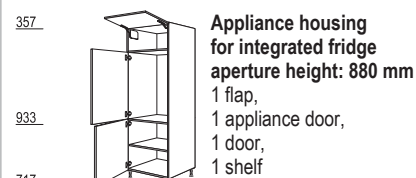


GD88-1

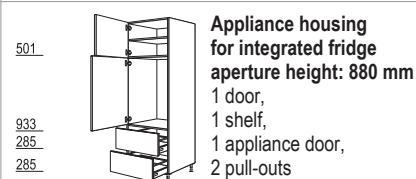


G88A-1


Appliance housings with aperture height up to 1230 mm

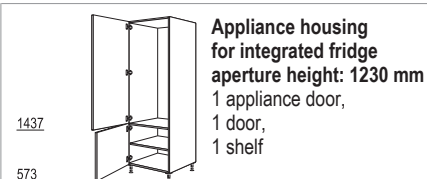

G123-1

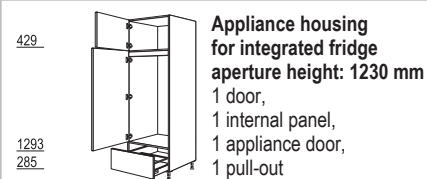

G123A-1


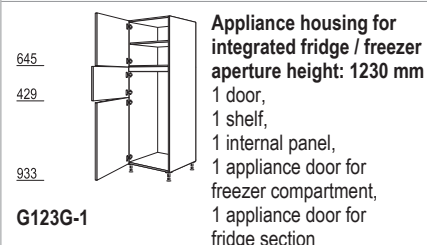


G123G-1



Tall units, height 1 – 2086 / 2116 / 2166 / 2216 mm high

Carcase depth: 561 mm
Carcase height: 2016 mm
Plinth height: 70, 100, 150 oder 200 mm


Appliance housings with aperture height up to 1450 mm

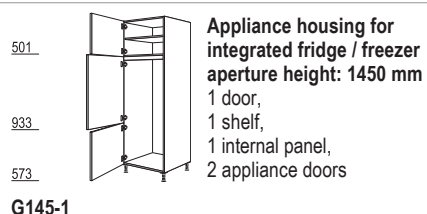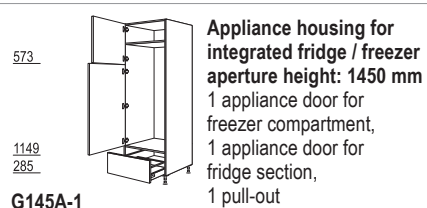

Fillers / Cladding

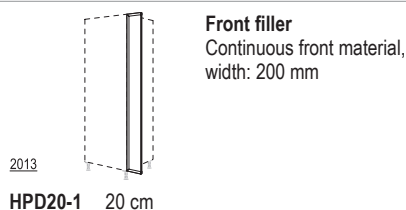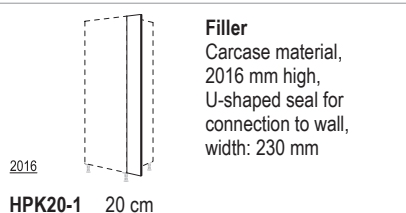

Appliance housings with aperture height between 1580 - 1940 mm

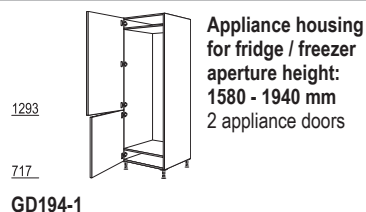

Tall units in XL height, height 1 XL – 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm




XL Tall units




H*-1X 30/40/50/60 cm




HDV*-1X 30/40/50/60 cm

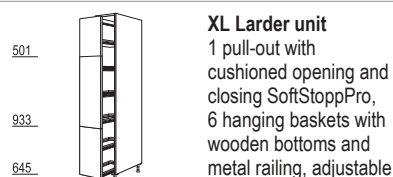


HA*-1X 30/40 cm

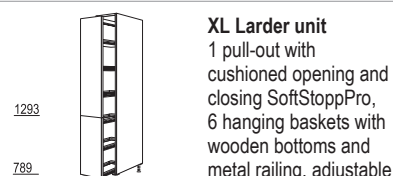

HDA*-1X 30/40 cm

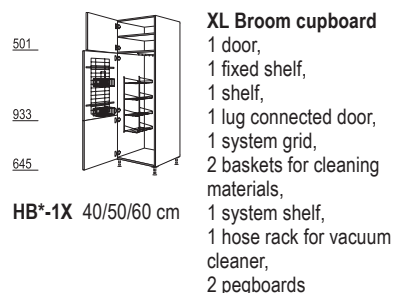

HB*-1X 40/50/60 cm

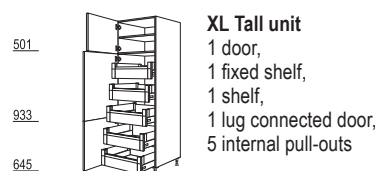

HI*-1X 40/50/60 cm


XL Appliance housing for ovens, micro-waves, steam cookers, compact appliances




GO-1X



GOS-1X

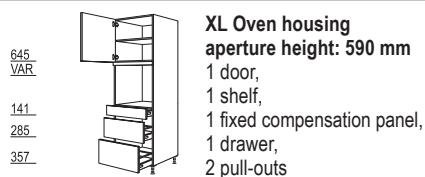


GOS2A-1X

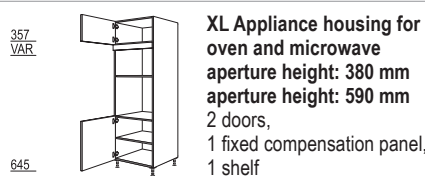


GMO-1X



GMOA-1X

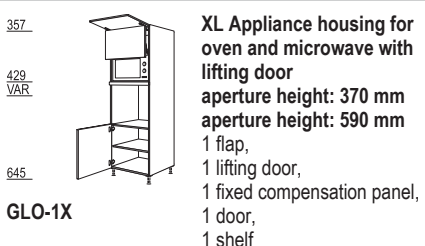


GLO-1X

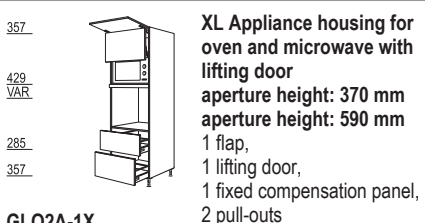


GLO2A-1X


XL Appliance housings with aperture height up to 880 mm

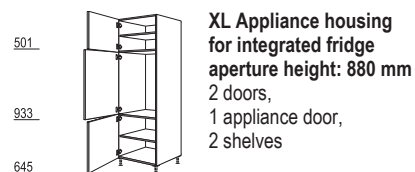

G88-1X

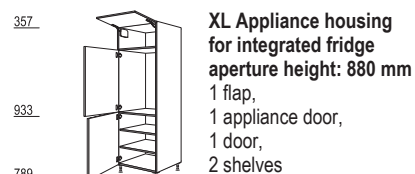


GD88-1X

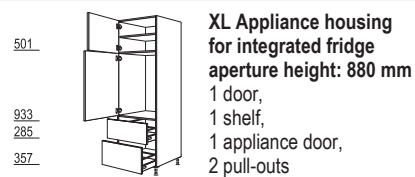


G88A-1X


XL Appliance housings with aperture height up to 1230 mm

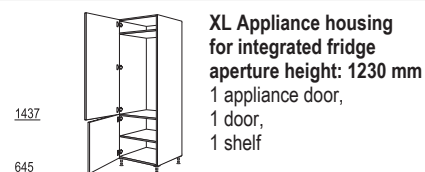

G123-1X

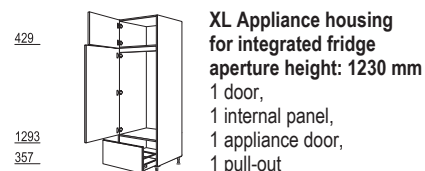

G123A-1X

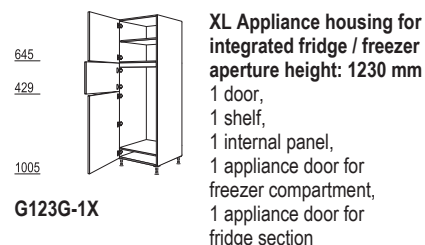


G123G-1X

Tall units in XL height, height 1 XL – 2158 / 2188 / 2238 / 2288 mm high


Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm



XL Appliance housings with aperture height up to 1450 mm

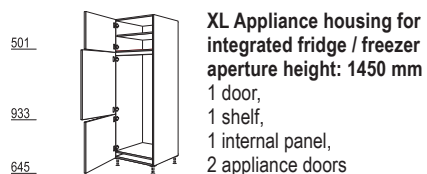


G145-1X

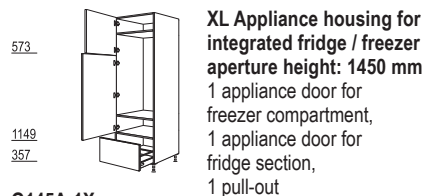


G145A-1X

XL Fillers / Cladding

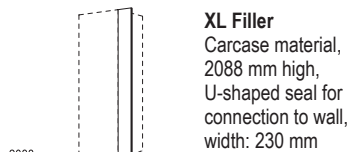

HPK20-1X 20 cm

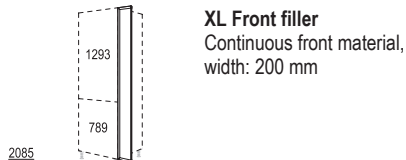

HPD20-1X 20 cm

XL Appliance housings with aperture height between 1580 - 1940 mm






GD194-1X








Tall units, height 2 – 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm




Tall units

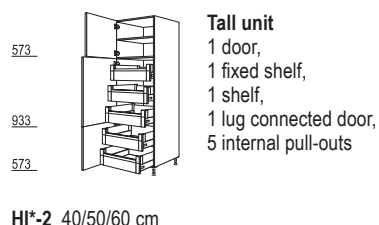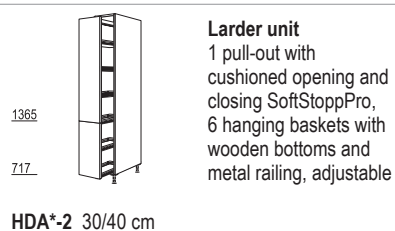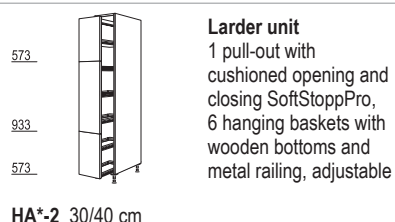




Appliance housing for ovens, microwaves, steam cookers, compact appliances

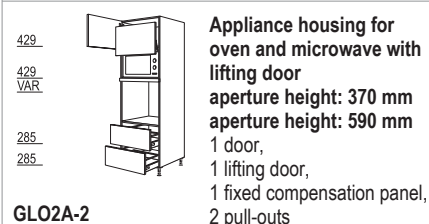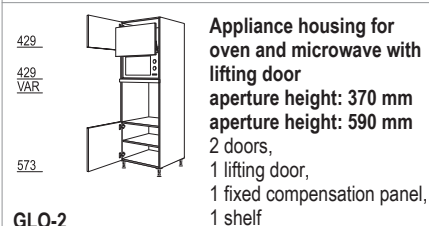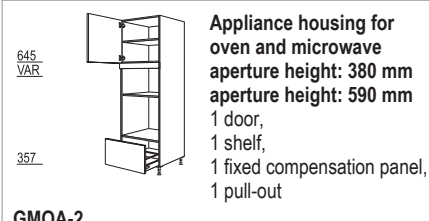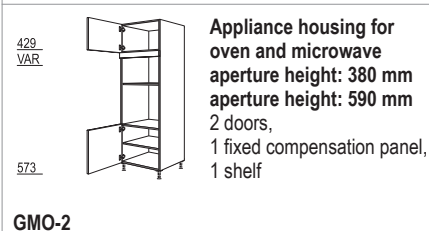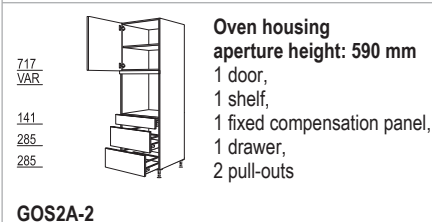

Appliance housings with aperture height up to 880 mm

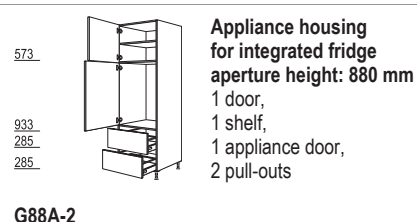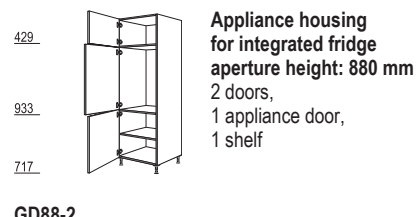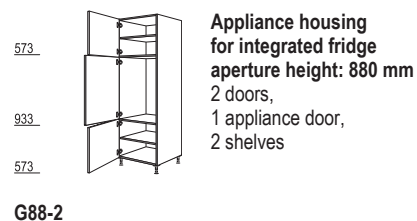



Appliance housings with aperture height up to 1230 mm

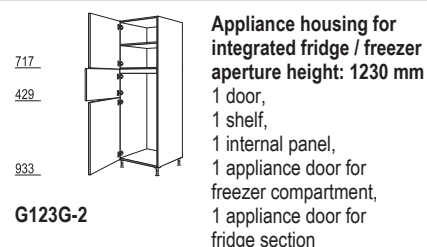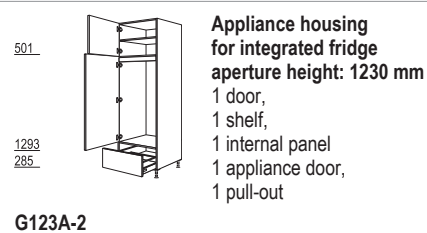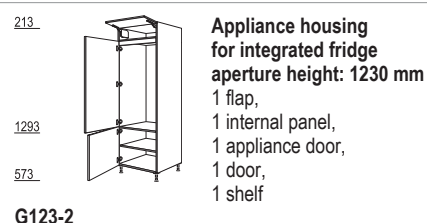



Tall units, height 2 – 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm


Appliance housings with aperture height up to 1450 mm

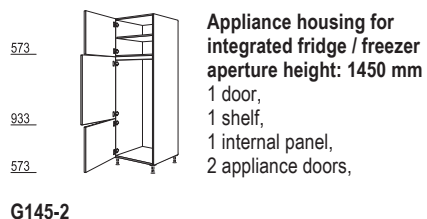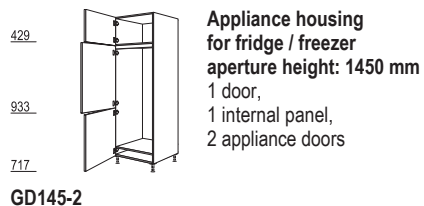

Fillers / Cladding

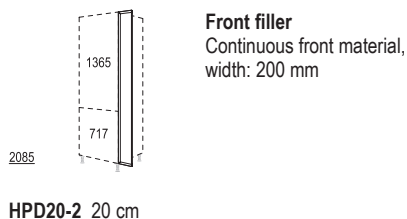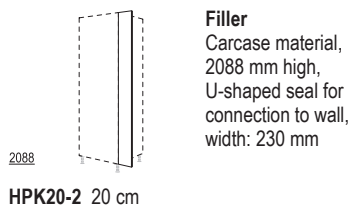

Appliance housings with aperture height between 1580 - 1940 mm

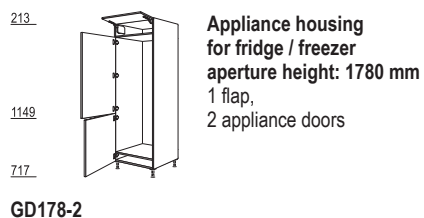


Tall units in XL height, height 2 XL – 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm




XL Tall units




XL Pantry unit
3 doors,
2 fixed shelves,
4 shelves

H*-2X 30/40/50/60 cm



XL Pantry unit
2 doors,
1 fixed shelf,
5 shelves

HDV*-2X 30/40/50/60 cm




XL Larder unit
1 pull-out with
cushioned opening and
closing SoftStoppPro,
6 hanging baskets with
wooden bottoms and
metal railing, adjustable

HA*-2X 30/40 cm




XL Larder unit
1 pull-out with
cushioned opening and
closing SoftStoppPro,
6 hanging baskets with
wooden bottoms and
metal railing, adjustable

HDA*-2X 30/40 cm



XL Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning
materials,
1 system shelf,
1 hose rack for vacuum
cleaner,
2 pegboards


HB*-2X 40/50/60 cm



XL Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs


HI*-2X 40/50/60 cm

XL Appliance housing for ovens, micro-waves, steam cookers, compact appliances




XL Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
3 shelves

GO-2X




XL Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
2 shelves

GOS-2X




XL Oven housing
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 drawer,
2 pull-outs

GOS2A-2X




XL Appliance housing
for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 shelf

GMO-2X




XL Appliance housing
for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 fixed compensation panel,
2 pull-outs

GMO2A-2X



XL Appliance housing
for oven and microwave with
lifting door
aperture height: 370 mm
aperture height: 590 mm
2 doors,
1 lifting door,
1 fixed compensation panel,
1 shelf


GLO-2X



XL Appliance housing
for oven and microwave with
lifting door
aperture height: 370 mm
aperture height: 590 mm
1 door,
1 lifting door,
1 fixed compensation panel,
2 pull-outs


GLO2A-2X

XL Appliance housings with aperture height up to 880 mm




XL Appliance housing
for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

G88-2X



XL Appliance housing
for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves


GD88-2X



XL Appliance housing
for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs


G88A-2X

XL Appliance housings with aperture height up to 1230 mm




XL Appliance housing
for integrated fridge
aperture height: 1230 mm
1 flap,
1 internal panel,
1 appliance door,
1 door,
1 shelf

G123-2X



XL Appliance housing
for integrated fridge
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel
1 appliance door,
1 pull-out

G123A-2X



XL Appliance housing
for integrated fridge / freezer
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door for
freezer compartment,
1 appliance door for
fridge section



G123G-2X

Tall units in XL height, height 2 XL – 2230 / 2260 / 2310 / 2360 mm high



Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm



XL Appliance housings with aperture height up to 1450 mm

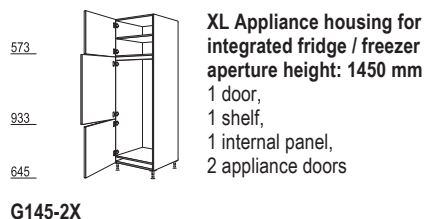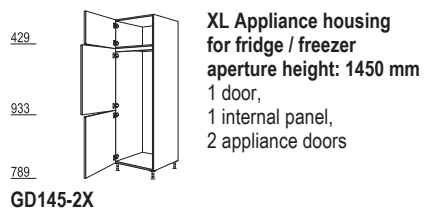

XL Fillers / Cladding

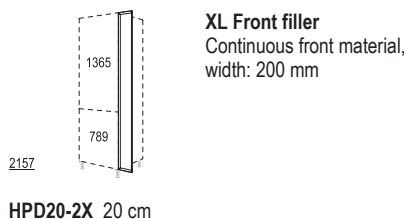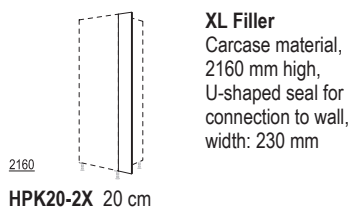

XL Appliance housings with aperture height between 1580 - 1940 mm



Tall units, height 3 – 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm


Tall units




H*-3 30/40/50/60 cm



HDV*-3 30/40/50/60 cm

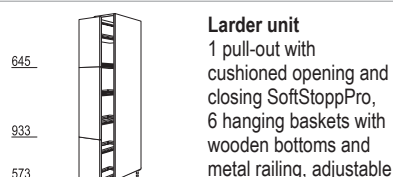


HA*-3 30/40 cm

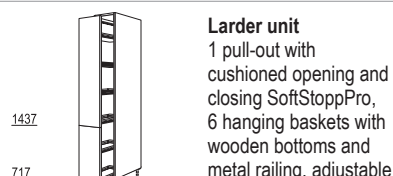

HDA*-3 30/40 cm




HB*-3 40/50/60 cm

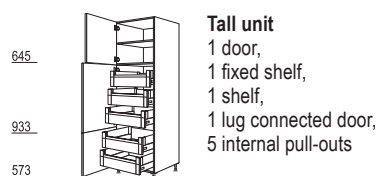


HI*-3 40/50/60 cm


Appliance housing for ovens, micro-waves, steam cookers, compact appliances

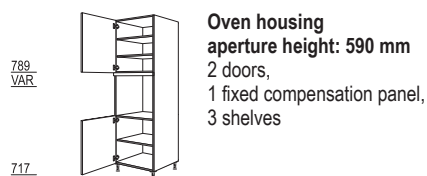


GO-3

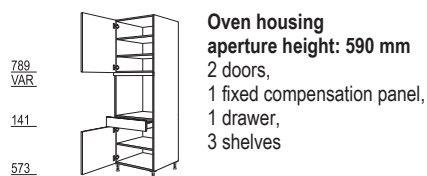


GOS-3

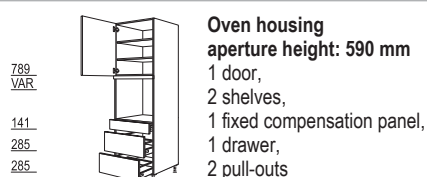


GOS2A-3

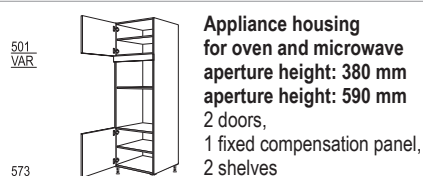


GMO-3

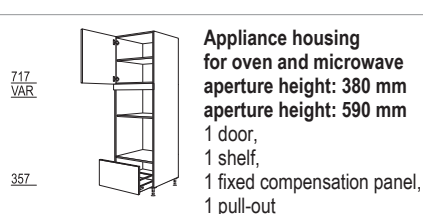

GMOA-3

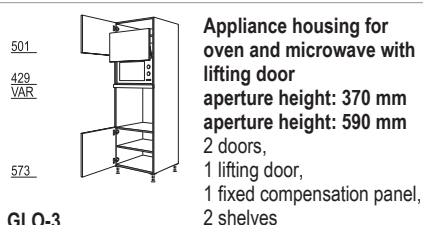


GLO-3

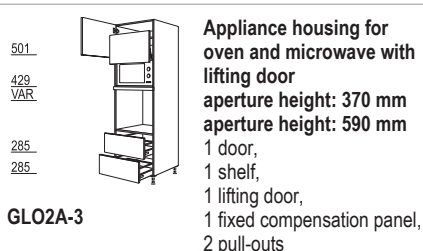


GLO2A-3


Appliance housings with aperture height up to 880 mm

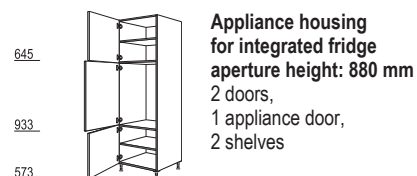

G88-3

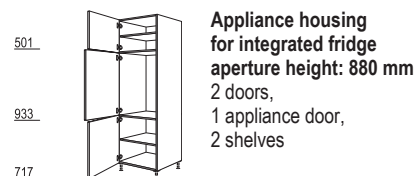


GD88-3

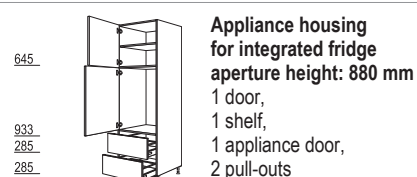


G88A-3


Appliance housings with aperture height up to 1230 mm

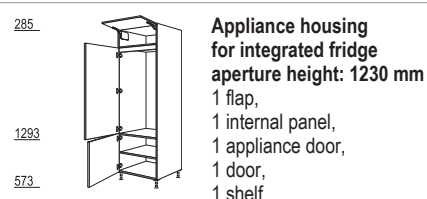

G123-3

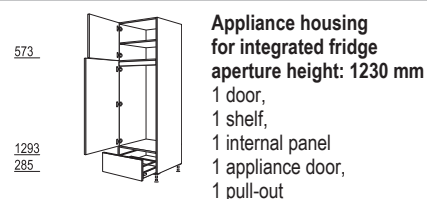

G123A-3


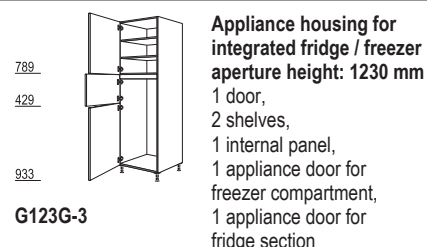


G123G-3



Tall units, height 3 – 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm


Appliance housings with aperture height up to 1450 mm

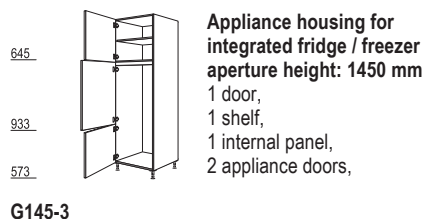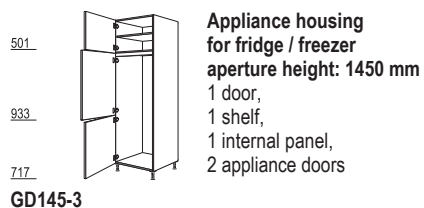

Fillers / Cladding

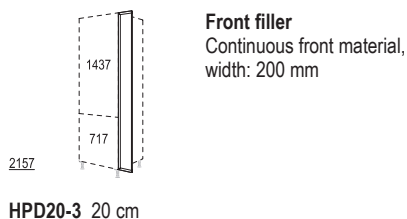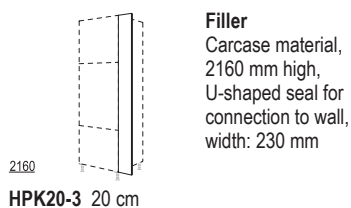

Appliance housings with aperture height between 1580 - 1940 mm

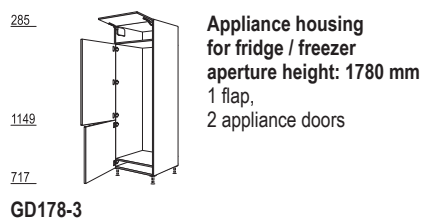


Tall units in XL height, height 3 XL – 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm
Carcase height: 2232 mm
Plinth height: 70, 100, 150 oder 200 mm




XL Tall units



H*-3X 30/40/50/60 cm

XL Pantry unit


3 doors,
2 fixed shelves,
4 shelves



HDV*-3X 30/40/50/60 cm

XL Pantry unit


2 doors,
1 fixed shelf,
5 shelves



HA*-3X 30/40 cm

XL Larder unit


1 pull-out with
cushioned opening and
closing SoftStoppPro,
5 hanging baskets with
wooden bottoms and
metal railing, adjustable,
1 fixed shelf



HDA*-3X 30/40 cm

XL Larder unit


1 pull-out with
cushioned opening and
closing SoftStoppPro,
5 hanging baskets with
wooden bottoms and
metal railing, adjustable,
1 fixed shelf



HB*-3X 40/50/60 cm

XL Broom cupboard

1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning
materials,
1 system shelf,
1 hose rack for vacuum
cleaner,
2 pegboards




HI*-3X 40/50/60 cm

XL Tall unit

1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs


XL Appliance housing for ovens, micro-waves, steam cookers, compact appliances



GO-3X

XL Oven housing


aperture height: 590 mm
2 doors,
1 fixed compensation panel,
4 shelves



GOS-3X

XL Oven housing


aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
3 shelves



GOS2A-3X

XL Oven housing


aperture height: 590 mm
1 door,
2 shelves,
1 fixed compensation panel,
1 drawer,
2 pull-outs



GMO-3X

XL Appliance housing


for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
2 shelves



GMOA-3X

XL Appliance housing


for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out



GLO-3X

XL Appliance housing

for oven and microwave with
lifting door
aperture height: 370 mm
aperture height: 590 mm
2 doors,
1 lifting door,
1 fixed compensation panel,
2 shelves




GLO2A-3X

XL Appliance housing

for oven and microwave with
lifting door
aperture height: 370 mm
aperture height: 590 mm
1 door,
1 shelf,
1 lifting door,
1 fixed compensation panel,
2 pull-outs


XL Appliance housings with aperture height up to 880 mm



G88-3X

XL Appliance housing


for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves



GD88-3X

XL Appliance housing

for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
3 shelves




G88A-3X

XL Appliance housing

for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs


XL Appliance housings with aperture height up to 1230 mm



G123-3X

XL Appliance housing


for integrated fridge
aperture height: 1230 mm
1 flap,
1 internal panel,
1 appliance door,
1 door,
1 shelf



G123A-3X

XL Appliance housing

for integrated fridge
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door,
1 pull-out



G123G-3X

XL Appliance housing



for integrated fridge / freezer
aperture height: 1230 mm
1 door,
2 shelves,
1 internal panel,
1 appliance door for
freezer compartment,
1 appliance door for
fridge section

Tall units in XL height, height 3 XL – 2302 / 2332 / 2382 / 2432 mm high



Carcase depth: 561 mm
Carcase height: 2232 mm
Plinth height: 70, 100, 150 oder 200 mm




XL Appliance housings with aperture height up to 1450 mm

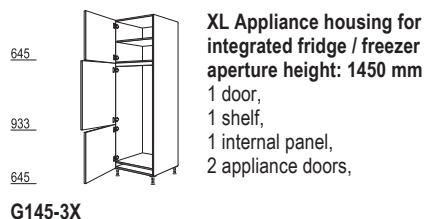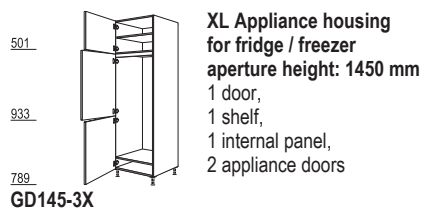

XL Fillers / Cladding

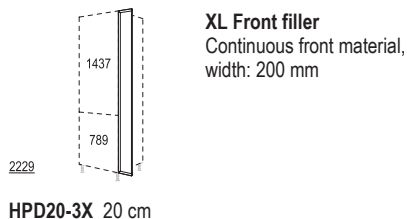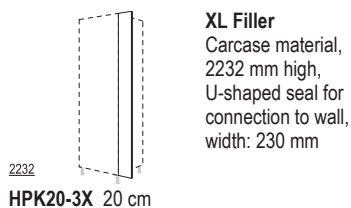


XL Appliance housings with aperture height between 1580 - 1940 mm

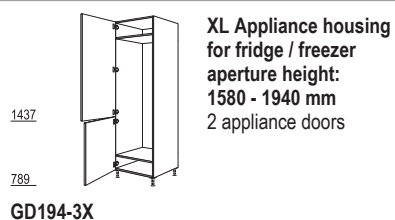

Wall units 360 mm high


Carcase depth: 350 mm
Carcase height: 360 mm

Wall units 360 mm high



Wall unit
1 door

W*-36
45/50/60 cm



Wall unit with flap door
1 flap,
opening angle 107°

WK*-36
45/50/60/80/90/100/
120 cm



Wall unit with framed glass flap door
1 framed glass flap door,
clear glass No. 01,
opening angle 107°,
glass variants against
surcharge: no. 02 / 39

WKG*-36
50/60/80/90/100/
120 cm

No image

Surcharge for different glass choice
for glass variants:
No. 02 Matt glass
No. 39 Black glass

MP-GW

Wall units 360 mm high



WKSQ*-36
50/60/80/90/100/
120 cm

Wall unit with glass doors Square

1 aluminium framed flap,
opening angle 107°,
handleless version with wall
unit bottom shelf with
attached profile strip in
stainless steel appearance

Available in:


No. 321 Aluminium framed
front in stainless steel
appearance with
02 Matt glass
No. 308 Aluminium framed
front in stainless steel
appearance with
035 Grey glass
No. 329 Aluminium framed
front in Black with
39 Black glass



Open shelf wall unit
side depth: 371 mm

WR*-36
30/40/45/50/60/80/90/
100/120 cm


Fillers



WPK*-36
10/20 cm

Filler

Carcase material,
360 mm high,
U-shaped seal for
connection to wall,
width: 100 mm / 200 mm



WPD20-36
20 cm

Front filler


Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm



Wall units 576 mm high

Carcase depth: 350 mm
Carcase height: 576 mm

Wall units 576 mm high




Wall unit
1 door,
1 shelf

W*-58
20/30/35/40/45/50/60 cm



Wall unit
2 doors,
1 shelf

W2T-58 60 cm
W*-58 80/90/100/120 cm



Wall unit
2 doors hinged
parallel,
1 shelf


W2TP*-58
80/90/100 cm



Wall unit
1 folding door with slide
mechanism,
1 shelf

WFT60-58
60 cm

Wall units 576 mm high




**Wall unit, folding/lifting
door**
1 folding/lifting door,
2 original fronts,
1 shelf

WFL*-58
50/60/80/90/100/120 cm



Wall unit for microwave
1 aperture depending
on appliance height,
1 flap as niche
compensation


WM*-58
50/60 cm



**Corner wall unit,
diagonal**
1 door: 394 mm wide,
opening angle 90°,
1 shelf,
Planning dimensions:
650 x 650 mm

WED65-58


Wall units 576 mm high



Corner wall unit
1 door,
1 angle filler,
1 shelf
Carcase widths:
600, 782, 882 mm


WE60-20-58
WE80-35-58
WE90-45-58

Planning dimensions
(variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm



Open shelf wall unit
1 fixed shelf,
side depth: 371 mm


WR*-58
15/20/30/40/45/50/60 cm



Wall unit as bottle rack
3 fixed shelves,
side depth: 371 mm


WRF15-58
15 cm

Fillers



Filler
Carcase material,
576 mm high,
U-shaped seal for
connection to wall,
width: 100 mm / 200 mm

WPK*-58
10/20 cm




Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-58
20 cm

Wall units, height 1 – 720 mm high

Carcase depth: 350 mm
Carcase height: 720 mm

Wall units 720 mm high




Wall unit
1 door,
2 shelves

W*-1
20/25/30/35/40/45/50/55/60 cm



Wall unit
2 doors,
2 shelves

W2T*-1 60 cm
W*-1 80/90/100 cm




Wall unit
2 doors hinged
parallel,
2 shelves

W2TP*-1
80/90/100 cm



Wall unit
1 folding door with slide
mechanism,
2 shelves

WFT60*-1
60 cm




Wall unit,
framed glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

WG*-1
45/50/60 cm



Wall unit,
framed glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

WG*-1
90/100 cm



Wall unit,
segmented glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

WGLS*-1
45/50/60 cm

Wall units 720 mm high



Wall unit,
segmented glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39


WGLS*-1
90/100 cm

No image

MP-GW


**Surcharge for different
glass choice**

for glass variants:
No. 02 Matt glass
No. 39 Black glass




**Wall unit, folding/lifting
door**
1 folding/lifting door,
2 original fronts,
2 shelves

WFL*-1
50/60/80/90/100/120 cm




Wall unit, folding/lifting door
1 folding/lifting door,
1 top original front,
1 bottom framed glass front,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

WFLG*-1
50/60/80/90/100/120 cm




Wall unit for microwave
1 aperture depending
on appliance height,
1 flap as niche
compensation

WM*-1
50/60 cm



Corner wall unit,
diagonal
1 door: 394 mm wide,
opening angle 90°,
2 shelves,
Planning dimensions:
650 x 650 mm

WED65*-1



Corner wall unit
2 doors
with 165° hinges,
2 shelves,
hinged side = first
door to be opened

WE*-1
60/65/80/90/90 cm

Wall units 720 mm high



Corner wall unit
1 door,
1 angle filler,
2 shelves
Carcase widths:
600, 782, 882 mm

WE60-20-1
WE80-35-1
WE90-45-1

Planning dimensions
(variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm



Open shelf wall unit
2 fixed shelves,
side depth: 371 mm

WR*-1
15/20/30/40/45/50/60 cm



Wall unit as bottle rack
4 fixed shelves,
side depth: 371 mm


WRF15-1
15 cm

Fillers



Filler
Carcass material,
720 mm high,
U-shaped seal for
connection to wall,
width: 100 mm / 200 mm

WPK*-1
10/20 cm




Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-1
20 cm

Wall units, height 2 – 792 mm high

Carcase depth: 350 mm
Carcase height: 792 mm

Wall units 792 mm high



Wall unit
1 door,
2 shelves

789

W*-2 20/25/30/35/40/45/50/55/60 cm



Wall unit
2 doors,
2 shelves

789

W2T*-2 60 cm
W*-2 80/90/100 cm



Wall unit
2 doors hinged
parallel,
2 shelves

789


W2TP*-2
80/90/100 cm



Wall unit
1 folding door with slide
mechanism,
2 shelves

789

WFT60-2
60 cm



**Wall unit,
framed glass door**
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

789

WG*-2
45/50/60 cm



**Wall unit,
framed glass door**
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

789

WG*-2
90/100 cm



**Wall unit,
segmented glass door**
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

429

141

WGLS*-2
45/50/60 cm



**Wall unit,
segmented glass door**
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

429

141

WGLS*-2
90/100 cm

No image

**Surcharge for different
glass choice**
for glass variants:
No. 02 Matt glass
No. 39 Black glass

MP-GW


Wall units 792 mm high



Wall unit for microwave
1 aperture depending
on appliance height,
1 flap as niche
compensation

VAR


WM*-2
50/60 cm



**Corner wall unit,
diagonal**
1 door: 394 mm wide,
opening angle 90°,
2 shelves,
Planning dimensions:
650 x 650 mm

789


WED65-2



Corner wall unit
2 doors
with 165° hinges,
2 shelves,
hinged side = first
door to be opened

789

WE*-2
60/65/80/90 cm



Corner wall unit
1 door,
1 angle filler,
2 shelves
Carcase widths:
600, 782, 882 mm

789

WE60-20-2
WE80-35-2
WE90-45-2
Planning dimensions
(variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm



Open shelf wall unit
2 fixed shelves,
side depth: 371 mm


WR*-2
15/20/30/40/45/50/60 cm



Wall unit as bottle rack
4 fixed shelves,
side depth: 371 mm

WRF15-2
15 cm

Wall units 792 mm high




**Wall unit,
folding/lifting door**
1 folding/lifting door,
2 original fronts,
2 shelves

429

357

WFL*-2
50/60/80/90/100/120 cm




**Wall unit,
folding/lifting door**
1 folding/lifting door,
1 top original front,
1 bottom framed glass front,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

429

357


WFLG*-2
50/60/80/90/100/120 cm

Fillers



Filler
Carcase material,
792 mm high,
U-shaped seal for
connection to wall,
width: 100 mm / 200 mm

WPK*-2
10/20 cm




Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-2
20 cm

Wall units, height 3 – 864 mm high

Carcase depth: 350 mm
Carcase height: 864 mm

Wall units 864 mm high



Wall unit
1 door,
2 shelves

861
W*-3 20/25/30/35/40/45/50/55/60 cm




Wall unit
2 doors,
2 shelves

861
W2T*-3 60 cm
W*-3 80/90/100 cm



Wall unit
2 doors hinged
parallel,
2 shelves

861
W2TP*-3
80/90/100 cm



Wall unit
1 folding door with slide
mechanism,
2 shelves

861
WFT60-3
60 cm



**Wall unit,
framed glass door**
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

861
WG*-3
45/50/60 cm



**Wall unit,
framed glass door**
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

861
WG*-3
90/100 cm



**Wall unit,
segmented glass door**
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

429
141
WGLS*-3
45/50/60 cm



**Wall unit,
segmented glass door**
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39


429
141
WGLS*-3
90/100 cm

No image

**Surcharge for different
glass choice**
for glass variants:
No. 02 Matt glass
No. 39 Black glass

MP-GW


Wall units 864 mm high



Wall unit for microwave
1 aperture depending
on appliance height,
1 door as niche compensation,
1 shelf


VAR

WM*-3
50/60 cm




**Corner wall unit,
diagonal**
1 door: 394 mm wide,
opening angle 90°,
2 shelves,
Planning dimensions:
650 x 650 mm

861
WED65-3



Corner wall unit
2 doors
with 165° hinges,
2 shelves,
hinged side = first
door to be opened


861
WE*-3
60/65/80/90 cm



Corner wall unit
1 door,
1 angle filler,
2 shelves
Carcase widths:
600, 782, 882 mm


861
WE60-20-3
WE80-35-3
WE90-45-3

Planning dimensions
(variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm



Open shelf wall unit
2 fixed shelves,
side depth: 371 mm

WR*-3
15/20/30/40/45/50/60 cm




Wall unit as bottle rack
5 fixed shelves,
side depth: 371 mm,
width: 150 mm

WRF15-3
15 cm

Wall units for cooker hoods

Wall units for cooker hoods



**Wall unit for
slimline cooker hoods**
internal panel,
metal grids,
80 mm deep,
the number of metal grids
depends on the built-in
dimensions of the cooker
hood


WDAF60-58 60 cm height: 576 mm

WDAF60-1 60 cm height: 720 mm

WDAF60-2 60 cm height: 792 mm

WDAF60-3 60 cm height: 864 mm

Bridging shelf




**Bridging shelf in
carcase material**
laminated on both faces in
the same colour,
16 mm thick,
350 mm deep,
with edging material on
3 sides,
for fitting between wall units
or as a window bridging.
Price per running 100 mm,
invoiced per started 100 mm.
Width: 250 - 2580 mm

WZB260

WZB60


Bridging shelf in carcase
material as above,
however 600 mm wide

Fillers



Filler
Carcase material,
864 mm high,
U-shaped seal for
connection to wall,
width: 100 mm / 200 mm

WPK*-3
10/20 cm



Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm


861
WPD20-3
20 cm

Plastic cutlery trays and pull-out organisers




BE*
30/40/45/50/60/80/
90/100/120 cm

Cutlery tray Trend
grey, height: 43 mm,
fits drawer depth of 500 mm,
side depth: 561 mm

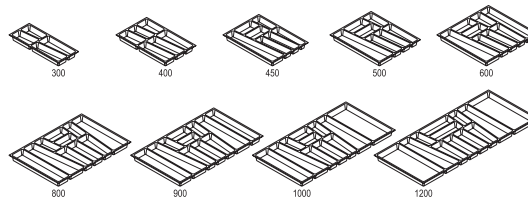


BE* -46
45/50/60/80/90/
100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm

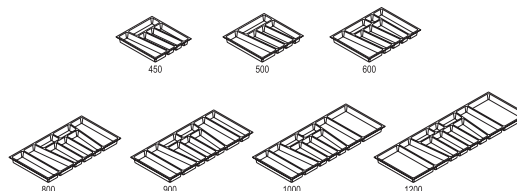


BE* M
30/40/45/50/60/80/
90/100/120 cm

Cutlery tray Move
silver-grey, with dividers for customisable divisions,
height: 47 mm,
fits drawer depth of 500 mm,
side depth: 561 mm

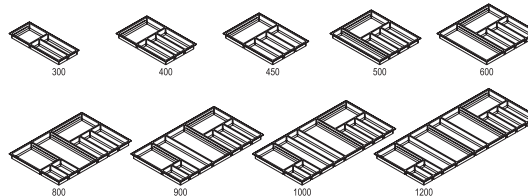

BE* -46 M
30/40/45/50/60/80/
90/100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm

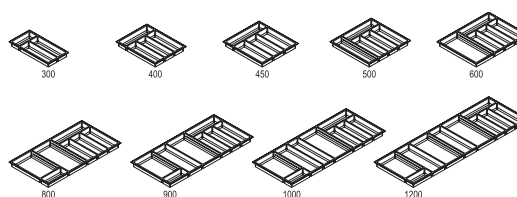

AUO 56

Universal organiser
Alu profile with 4 dividers for individualised divisions, height: 125 mm, fits pull-out depth of 500 mm,
side depth: 561 mm,
1 alu profile of 600 mm width,
2 alu profiles of 800 up to 900 mm width,
3 alu profiles of 1000 up to 1200 mm width

Please order the correct number for the unit width!


AUO 46

as above, however for pull-out depth 400 mm,
side depth: 461 mm




BE* C
30/40/45/50/60/80/
90/100/120 cm

Cutlery tray Concept
Non-slip soft touch surface,
anthracite, height: 52 mm, fits drawer depth of 500 mm,
side depth: 561 mm

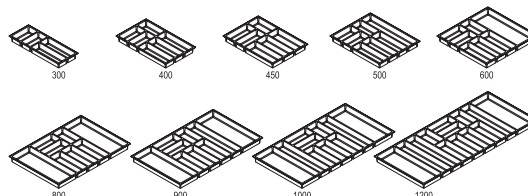

AO* C
60/80/90/100/120 cm

Pull-out organisation concept
Non-slip soft touch surface,
anthracite, height: 100 mm, fits pull-out depth of 500 mm,
side depth: 561 mm

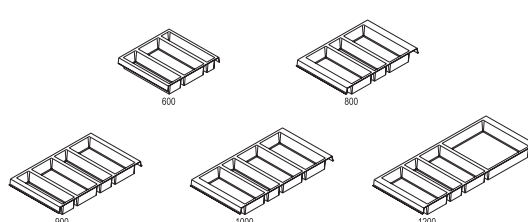

Accessories


Plastic cutlery trays and pull-out organisers



BE* BE
30/40/45/50/60/80/
90/100/120 cm

Cutlery tray black edition
Non-slip soft touch surface,
black, height: 52 mm,
fits drawer depth 500 mm,
side depth: 561 mm

black
edition

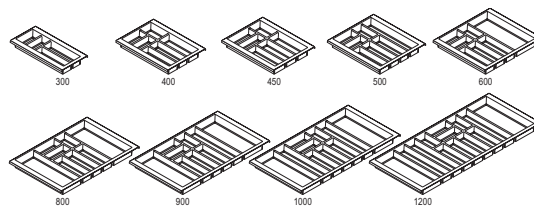


Black ash cutlery trays and pull-out organisers



BE* N
30/40/45/50/60/80/
90/100/120 cm

Black ash wood cutlery tray
solid ash wood, stained black,
height: 56 mm, fits drawer depth of 500 mm,
side depth: 561 mm


black
edition

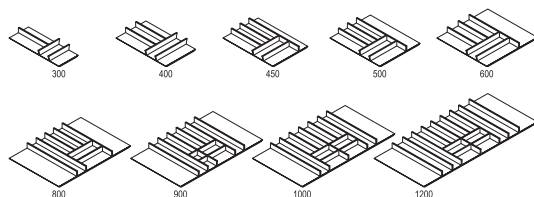

BE-MVGS* N
80/90/100/120 cm

**Black ash wood cutlery tray with knife block,
storage containers and insert for spice mills and shakers**
Design in solid ash wood, stained black,
incl. 5 knives, 6 storage containers, 3 spice mills, 3 shakers,
height: 56 mm, fits drawer depth 500 mm,
side depth: 561 mm

black
edition



AO* N
60/80/90/100/120 cm

Universal organiser, black ash
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 8 solid wood partitions in ash for 600 mm width,
incl. 16 solid wood partitions in ash for 800/900/1000 mm width,
incl. 24 solid wood partitions in ash for 1200 mm width

black
edition



AOS* N
60/80/90/100/120 cm

Universal organiser, black ash
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 7 solid wood partitions in ash for 600 mm width,
incl. 10 solid wood partitions in ash for 800/900/1000 mm width,
incl. 13 solid wood partitions in ash for 1200 mm width

black
edition



Accessories

Beech cutlery trays and pull-out organisers




Beech wood cutlery tray

solid beech wood,
height: 56 mm, fits drawer depth of 500 mm,
side depth: 561 mm

BE* H

30/40/45/50/60/80/
90/100/120 cm

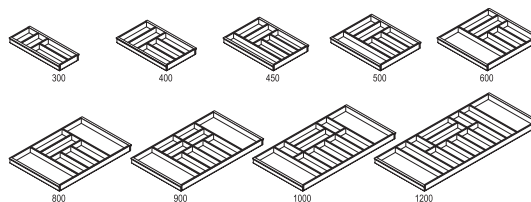

Beech wood universal organiser

with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm,
side depth: 561 mm,
incl. 7 solid wood partitions in beech for 600 mm width,
incl. 10 solid wood partitions in beech for 800 / 900 / 1000 mm width,
incl. 13 solid wood partitions in beech for 1200 mm width

AOS* H

60/80/90/100/120 cm

Oak cutlery trays and pull-out organisers




Oak wooden segment cutlery tray

solid wood design in oak,
with anti-slip mat in anthracite,
height: 55 mm, segment width: 274 mm,
fits drawer depth of 500 mm,
side depth: 561 mm,
one wooden segment is delivered up to a width of 600 mm,
for widths exceeding 800 mm, two wooden segments are delivered

BEHS* E


40/45/50/60/80/90/
100/120 cm

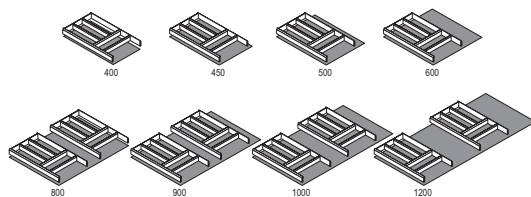

BEHS* -46 E

40/45/50/60/80/90/
100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm

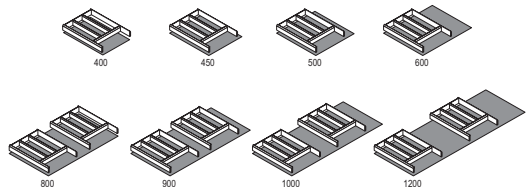

Universal organiser, oak

with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm,
side depth: 561 mm,
incl. 7 solid wood partitions in oak for 600 mm width,
incl. 10 solid wood partitions in oak for 800 / 900 / 1000 mm width,
incl. 13 solid wood partitions in oak for 1200 mm width

AOS* E

60/80/90/100/120 cm



Accessories

Mounting sets



MONSET 1

Mounting set 1

consisting of:

- 1 ball siphon 1 1/2" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut




MONSET 2

Mounting set 2

consisting of:

- 1 ball siphon 1 1/2" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut
- 1 hose clip, 16 - 25 mm
- 1 table socket, triple, sockets - model F, with contact protection, white with 1500 mm supply line, 3 x 1.5 mm²

Accessories for sink units



FB*

40/45/50/60/80/90/
100/120 cm

Moisture protection sheet

aluminium sheet, serrated, for sink base units, cannot be used with front pull-outs, fits only for a side depth of 561 mm

FB90: also fits corner sink units SPUE(D)90-45(-X) and NSPUE90-45(-X)

FB100: also fits corner sink units SPUE(D)100-50(-X) and NSPUE100-50(-X)




WSMS*

40/45/50/60/80/90/
100/120 cm

Waterproof mat

plastic, slate grey, for sink base units, not for use with front pull-outs, fits only side depth of 561 mm

Not possible in conjunction with hose and cable feed-through SKD or with opening support mechanism Libero AOUL.



WSMP*

60/80 cm

Waterproof mat Pro for sink units

Slate grey plastic, for preventing water damage in sink units not suitable for front pull-outs, only suitable for 561 mm side depth

Upstands



WAP

200/400/500 cm

Length 2000 mm


Length 4000 mm

Special length 5000 mm

Plastic upstand

Top section with sealing lips, dimensions: 25 mm high, 25 mm deep, delivered as strand material.

Available in all worktop décors, also available in:
No. 014 Stainless steel appearance



WAPN-Z

WAP accessory bag

matches the plastic upstands WAPN consisting of:

- 4 x interior corner 90°
- 2 x interior corner 135°
- 2 x exterior corner 90°
- 2 x set of end caps



WAPN

200/400/500 cm

Length 2000 mm

Length 4000 mm

Special length 5000 mm

Upstands for continuous planning with niche cladding

2-piece plastic profile with sealing lip, incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep delivered as strand material.

Available in:
014 Stainless steel appearance, 010 Black

Bottom profile adds 4 mm to the worktop.



WAPN-Z

WAP accessory bag

matches the plastic upstands WAPN consisting of:

- 4 x interior corner 90° / 2 x interior corner 135°
- 2 x exterior corner 90°
- 2 x set of end caps for WAPN
- 2 x set of end caps for niche cladding

Available in:
014 Stainless steel appearance, 010 Black

Waste collecting systems (fitted on bottom shelf behind hinged door)



AS9430

Built-in waste collector „Solo“

plastic, slate grey, with full pull-out, capacity: 20 litres,
Built-in dimensions: h x w x d = 396 x 245 x 427 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 300 mm door width.

Take sink syphon into account and plan space saving connector 021!



AS4311

Built-in waste collector „Tandem“ as a full pull-out

with 2 bins for ecological waste separation, with mechanical pull-out and lid lifting system,
dimensions: h x w x d = 415 x 250 x 480 mm. Volume: 2 x 15 l.
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 300 mm door width.

Take sink syphon into account and plan space saving connector 021!



AS4753

Built-in waste collector Bio-Trio 30 DT

With 3 plastic bins, Orion grey,
for odourless, ecological waste separation,
plastic parts Orion grey, capacity: 3 x 10 litres, incl. bio lid,
h x w x d = 385 x 254 x 475 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 300 mm door width.

Take sink syphon into account and plan space saving connector 021!



AS4742

Built-in waste collector „space saving Tandem“

sorting in 3 bins:
volume: 1 x 18 l, 2 x 8.5 l,
1 additional bio lid,
h x w x d = 320 x 336 x 471 mm

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!



AS9431

Built-in waste collector „space saving Tandem S“

sorting in 3 bins:
volume: 1 x 12 l, 2 x 8.5 l,
1 additional bio lid,
h x w x d = 347 x 434 x 330 mm

Can be built-in upwards of 500 mm door width.

Take sink syphon into account and plan space saving connector 021!



AS4752

Waste collector 40 DT

2 plastic bins, Orion grey,
for ecological waste separation, capacity: 2 x 16 l,
h x w x d = 320 x 338 x 475 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

Waste collecting systems (pull-outs, fitted to the front)



Built-in waste collector „Syncro“

Fully synchronised pull-out rails, with over extension runner, cushioned and covered, metal and plastic parts in slate grey.

h x d: 424 x 400 mm

Contents: 2 x 18 litres

Matching sink units: SPUA(D)45(-X) / SPUA45(-M) / NSPUAL45(-X)!

AS3550

AS3551

as above, however, with the following contents:
1 x 18 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)50(-X) / SPUA50(-M) / NSPUAL50(-X)!

AS3552

as above, however, with the following contents:
2 x 28 l

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!

AS3553

as above, however, with the following contents:
1 x 28 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!



Built-in waste collector „X-Line“ X45 M35 Basic

35-litre large container with cover frame with flexible bin liner clamping system, suitable for 35-litre waste bags,

Basic drawer as partial pull-out,

h x w x d: 393 x 418 x 368 mm

Matching sink units: SPUA(D)-BW45/SPUA(D)K-BW45(-X) and NSPUA(K)-BW45(-X)!

AS9426

AS9428

Built-in waste collector “X-Line” X50 M35 Basic

as above, but

h x w x d: 393 x 468 x 368 mm

Matching sink units: SPUA(D)-BW50/SPUA(D)K-BW50(-X) and NSPUA(K)-BW50(-X)!



Built-in waste collector “X-Line” X60 M7 Basic

as above, but with additional 15 litre container with lid,

h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

AS9429



Built-in waste collector “X-Line” X60 M5 Basic

as above, but with additional base tray that can be placed on the left or right

8- and 5-litre container with lid,

h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

AS9433

Waste collecting systems (fitted to hinged door)



AS9441

Built-in waste collector, silver-coloured

made of metal with removable plastic waste bins, lid and rims are black plastic, right-hand side or left-hand side mounting, no load on door hinges, 13 l capacity. Lid automatically lifts upon opening door. Dimensions: h x w x d = 470 x 340 x 285 mm
Please note: Only mount waste collector on side wall with door hinge or on centre stile with corner sink units.

Can be built-in upwards of 400 mm door width.



AS9449

Built-in waste collector

flat design, 19 l volume container. Installation dimensions: h x w x d = 470 x 410 x 210 mm.
Please note! Waste container only to be fitted to the side wall with door fittings, or to the centre post of corner sink units.
 In case of corner sink units, the adapter, order No. 9465 (to be fitted to the centre post) is required.

Can be built-in upwards of 450 mm door width.



AS9440

Econtainer Junior, double waste collector

flat design, with two 10 l and 19 l bins. Dimensions: h x w x d = 470 x 460 x 400 mm.
Please note! Waste connector can only be fitted to the side panel with door fittings, or to the centre post of corner sink units.
 In case of corner sink units the adapter, order No. 9465 (to be fitted to the centre post) is required.

Can be built-in upwards of 500 mm door width.

Front bin fits underneath the sink connections, order space saving adapter 021.




AS9450

Built-in waste collector „Euro Flexx“

35 l large container with cover frame and bin liner clamping system, fits 1 x 35 l or 2 x 17 l, lid with indentation can be mounted on the right or left
 h x w x d = 499 x 370 x 356 mm

Can be built-in upwards of 450 mm door width.




ASZ9465


Adapter for corner sink base units with centre post, galvanised

suitable for all Econtainers and 9449 / 9440 waste collectors.
Please note! Observe door widths to be sufficient to allow the installation of waste collectors.
 Screw the adapter to the centre post, and then fasten the waste collector holder.


Height grid, carcass heights

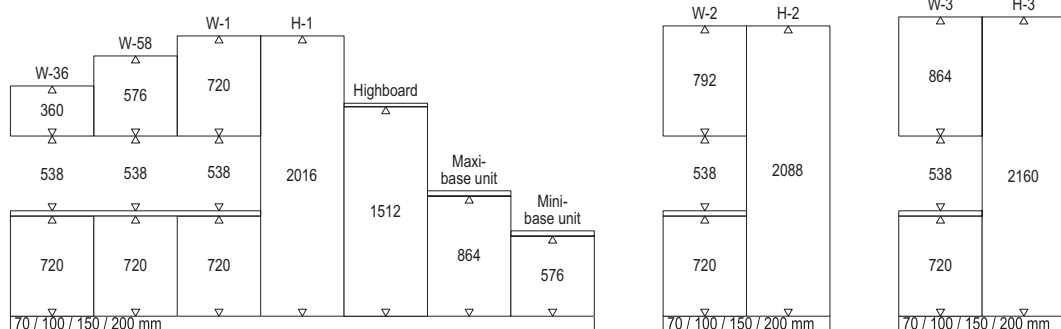


Height grid, XL carcass heights

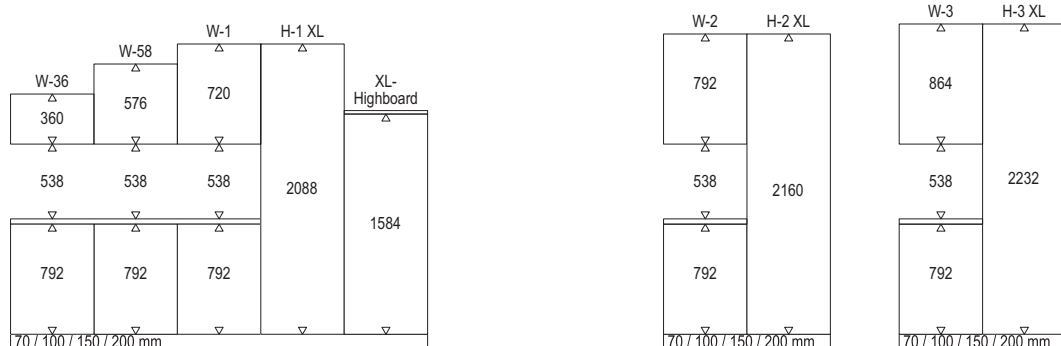


Height grid, standard and maxi door dimensions

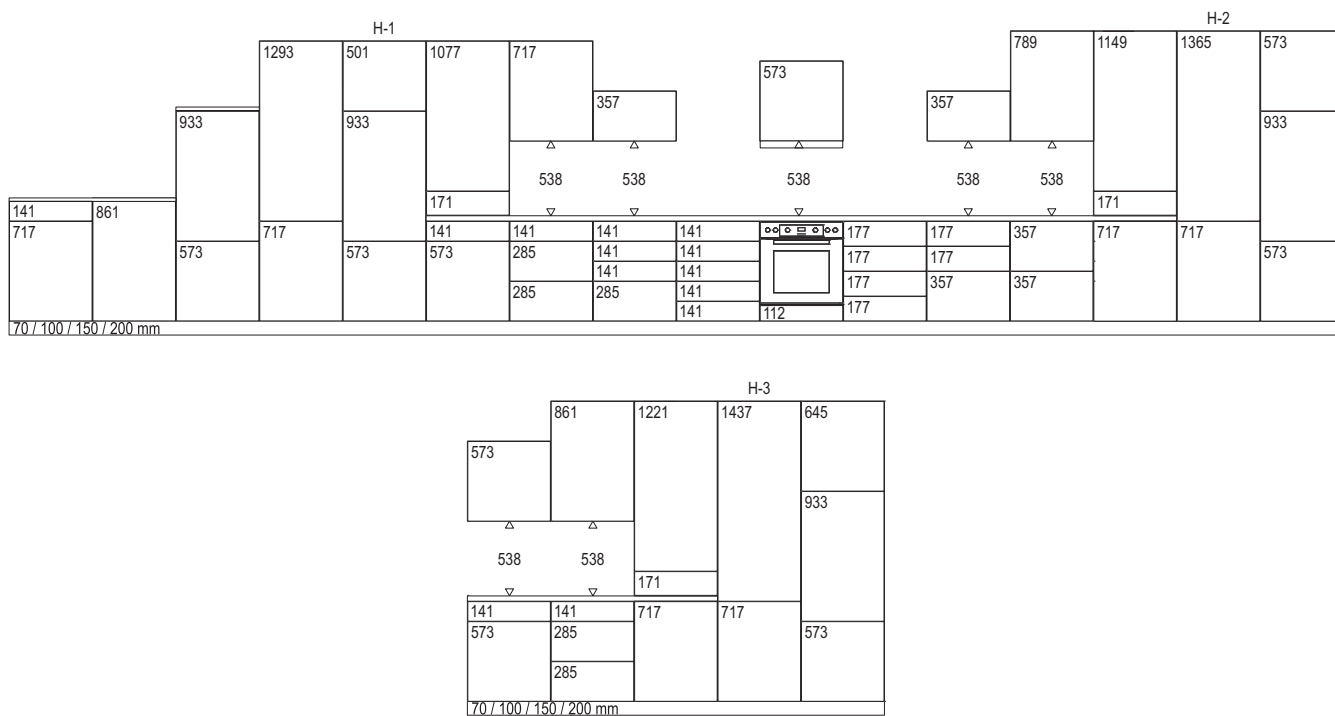


Height grid, XL door dimensions, Height 1

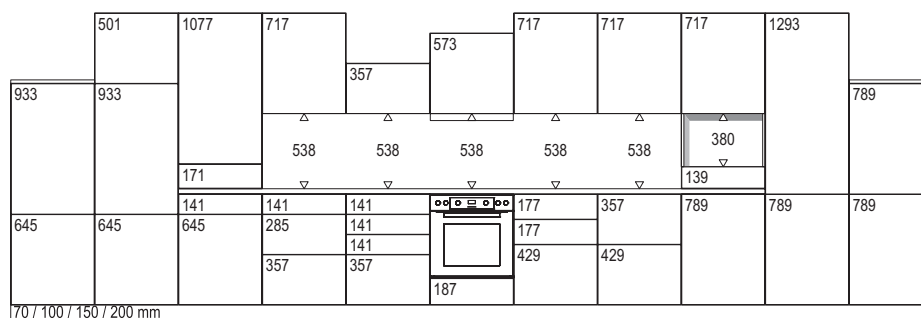


Height grid, XL door dimensions, Height 2

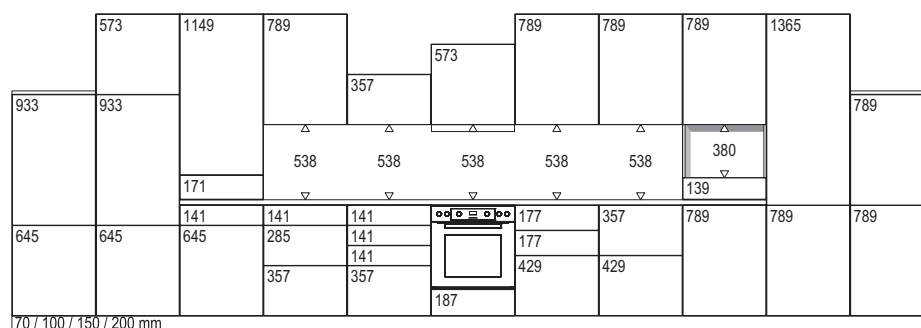

Height grid, XL door dimensions, Height 3

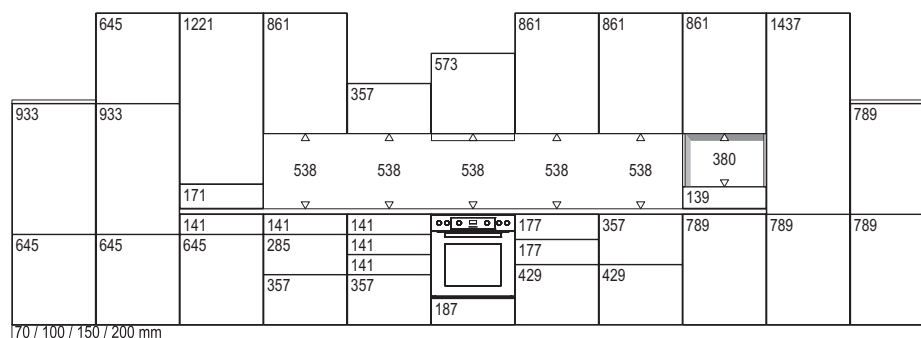

Height grid, tall units

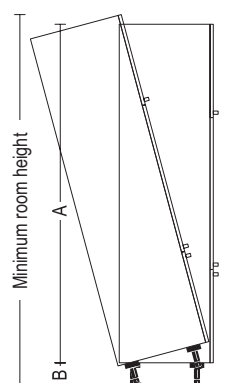

Minimum room heights

A* \ B*	70 mm	100 mm	150 mm	200 mm
2016 mm	2147 mm	2176 mm	2224 mm	2273 mm
2088 mm	2217 mm	2246 mm	2295 mm	2343 mm
2160 mm	2287 mm	2316 mm	2365 mm	2414 mm
2232 mm	2357 mm	2386 mm	2435 mm	2484 mm

A* = Tall unit height
B* = Plinth height

